

Full Dash Cover TXT Models




B



Mount using 6 of #6x1/2" philips screws.

D

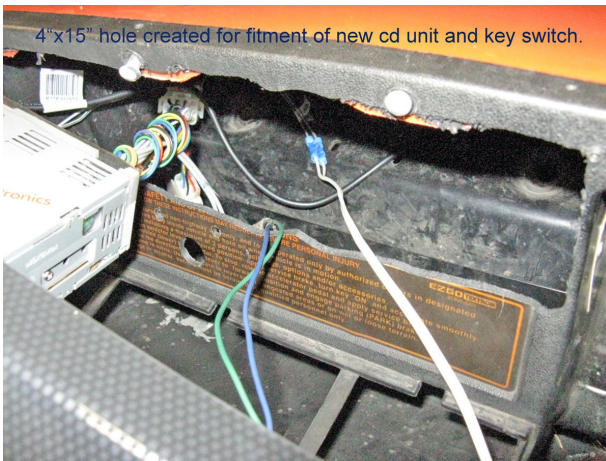


4"x15" hole created for fitment of new cd unit and key switch.

A



E

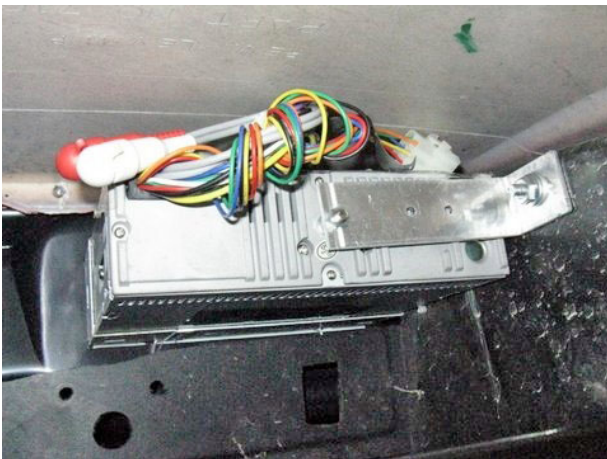

C

(B) Mounted To Car

Remove the steering wheel and cut out a 4"X15" area out of the O.E.M. dash (A). Install the Radio/Speakers into new dash. Slide dash over steering column and set into car dash area. To support the radio use a piece of 3 3/4" Aluminum or steel (1/8" thick) and bend at an angle to fit the rear mount stud on radio. The other end mount to the driver's side compartment (C). Route all wiring at this time. Install six #6 X 1/2" screws spaced evenly to secure the dash to car (D). Install the three mounting bolts supplied with kit. Drill through floor for bolt installation (5/16" drill). One more will be found under lid (E).

Note: move the key switch and plate as shown in (B).